

TOLERANCES	
d_1	+.000" –.002" (+.000 –.050mm)
d_2	-.0001" -.0005" (-.0025 - .0127mm)
ball radius	+.000" –.001" (+.000 –.025mm)




Standard Length - Double End - 3/8" Shank - Ball End



Solid submicron grain carbide end mill - center cutting
Common 3/8" diameter shank with weldon flat
For strength and adaptability when converting from high speed steel

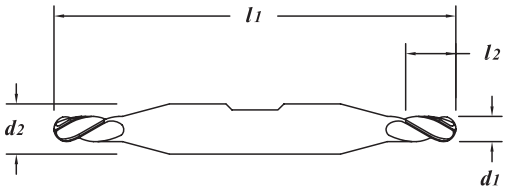

(535M) EDP#	d_1 † Diameter Decimal	Diameter	Metric	d_2 Shank Diameter	l_1 Overall Length	l_2 Flute Length	LIST PRICE
36010	.1250	1/8"	3.175	3/8"	3"	3/8"	43.99
36030	.1875	3/16"	4.763	3/8"	3"	1/2"	43.99




Standard Length - Double End - 3/8" Shank - Ball End



TiALN Coated

Solid submicron grain carbide end mill - center cutting
Common 3/8" diameter shank with weldon flat
For strength and adaptability when converting from high speed steel
Dry or semi-dry machining

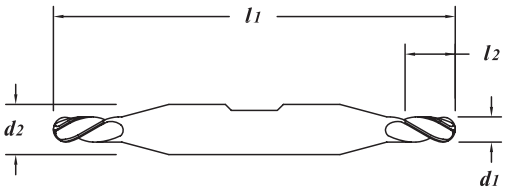

(535MA) EDP#	d_1 † Diameter Decimal	Diameter	Metric	d_2 Shank Diameter	l_1 Overall Length	l_2 Flute Length	LIST PRICE
36017	.1250	1/8"	3.175	3/8"	3"	3/8"	55.81
36027	.1562	5/32"	3.967	3/8"	3"	7/16"	55.81
36037	.1875	3/16"	4.763	3/8"	3"	1/2"	55.81
36057	.2500	1/4"	6.350	3/8"	3"	5/8"	55.81
36077	.3125	5/16"	7.938	3/8"	4"	3/4"	65.54